


Avionics Standard Communications Bus Monitor Card

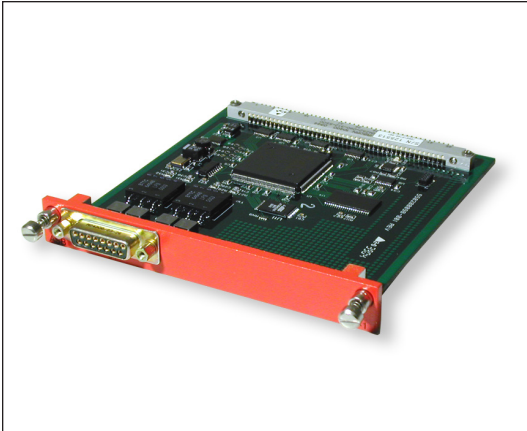

Applications

- Avionics bus monitoring
- ASCB message storage
- ASCB message display

Features

- Avionics Standard Communications Bus (ASCB) monitor card
- Supports (ASCB) versions B and C
- Two channels for monitoring two busses
- All incoming messages are stored on the card
- Message storage in 512 KByte static RAM
- Message words are selectable for Class I PCM transmission
- Multiple cards in a single chassis
- Microsoft Windows application software included

Description

The ASB-100 card serves as a bus monitor for messages being transmitted on the Avionics Standard Communications Bus (ASCB) Versions B and C. The ASB-100 has two (2) channels for monitoring 2 busses. All messages on both busses will be stored into the ASB-100 message RAM. Under format control, the messages can be selected and displayed in the TTCWare PCM data display.

Revision 05/11/2015

ASB-100 Datasheet

©2015 Teletronics - A Curtiss-Wright Company
Specifications subject to change without notice.

Approved for Public Release 15-S-2192



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008

Teletronics - A Curtiss-Wright Company
15 Terry Drive, Newtown, PA 18940
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com