


## 4-Channel RS-232/422/485 Bus Monitor Card

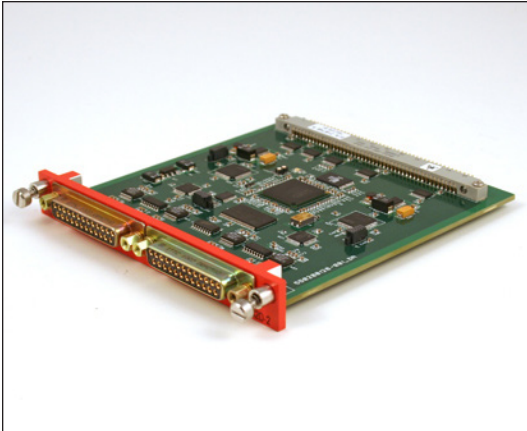

### Applications

- Aircraft instrumentation
- Avionics
- Lab test

### Features

- 4-channel RS-232/422/485 bus monitor card
- Compatible with RS-232 Honeywell PPT Transducers, Model PPT, PPT-R and PPT2
- Compatible with Rosemount Micro Air Data Transducer (Model 2014MB)
- Compatible with Paroscientific Pressure Transducers (Series 1000, 6000, and 9000) (Output data formatted as IEEE-754 32 bit or scaled 16 bit binary format)
- Compatible with Kulite pressure scanner model KMPS-1-32/64
- Programmable RS-232 characteristics:
  - RS-232, RS-422 or RS-485 operation
  - Baud rates from 50 to 460,800 Baud (921,600 in Kulite mode)
  - 5, 6, 7, or 8 data bits
  - 1, 1.5, or 2 stop bits
  - Odd, even, or no parity
- Timestamp per channel with high, low and micro time
- As a bus monitor:
  - Supports EIA-RS-232 standard
- Multiple operating modes:
  - Available on a per-channel basis
  - FIFO, current value table or double buffer mode
- One (1) external sync. pulse provided per channel
- Multiple cards in a single chassis
- Programmable data organization to pack two bytes into one PCM word and select which byte is the most significant byte
- Data packetization modes:
  - Gap intervals in increments of 10ms or 249us w/message length qualification
  - Sync patterns of 3 to 6 bytes in length w/message length qualification
  - Alternating sync patterns of 2 or 3 bytes per pattern
  - PCM format controlled and sync pulse output for external system synchronization
- Microsoft Windows application software included

### Description

The BIM-232D-4 is a 4-channel RS-232 bus monitor card for use in TTC's EDAU/CDAU/WDAU/nDAU-2000 series products. The card supports serial communications per the EIA-RS-232 standard at baud rates from 50 baud up to 460.8 Kbaud on a per-channel basis (921.6 Kbaud in Kulite mode). One channel operation up to 921.6 Kbaud per channel pair. High, low and micro timestamping are provided on a per-data-packet basis.

Revision 10/20/2016

### BIM-232D-4 Datasheet

©2016 Teletronics - A Curtiss-Wright Company  
Specifications subject to change without notice.

Approved for Public Release 17-S-0349



CAIS  
Compatible



Management  
System  
AS9100C  
ISO 9001:2008

Teletronics - A Curtiss-Wright Company  
15 Terry Drive, Newtown, PA 18940  
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

**www.ttcdas.com**