


Remote CAIS Overhead Card for the CDAU-2010/12/16

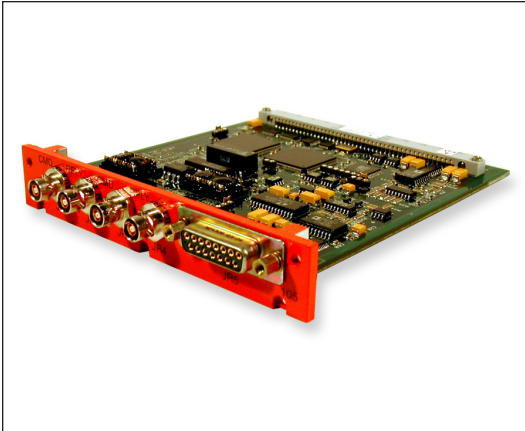

Applications

- CAIS Applications
- Distributed Systems
- Time-tagging data

Features

- Remote CAIS Bus I/O overhead card for use in the CDAU-2010/12/16 unit
- Has Remote Unit ID strapping provisions (1 of 60, i.e. 6 lines)
- Operate as the local controller to I/O digital and analog signal conditioning cards in the chassis
- Contains a 32Kx16 EEPROM (maps the instructions coming from the master to the Remote I/O modules)
- Accepts preconditioned digital and analog data from various Remote I/O cards
- Provides programmable secondary gains and offset for some I/O cards
- Operates at up to 416 KSPS (5 MBPS at 12 bits-per-word)
- Includes an IRIG-B Time Code Reader/Generator

Description

The RCI-105 is used for the CDAU-2010/12/16 as the remote I/O controller card. It accepts CAIS commands from a CAIS controller and replies with data acquired from the I/O cards to the CAIS controller. It allows for CAIS programming, BIT, System Audit and Simultaneous Sampling. The card includes an IRIG-B AC or DC reader and IRIG-B DC time generator.

Revision 05/12/2015

RCI-105 Datasheet

©2015 Teletronics - A Curtiss-Wright Company
 Specifications subject to change without notice.

Approved for Public Release 16-S-1215



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008

Teletronics - A Curtiss-Wright Company
 15 Terry Drive, Newtown, PA 18940
 phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com