

48 Cubic Inch Telemetry Receiver




Features

- L & S Bands
- IF Bandwidth to 4 MHz
- Frequency Selectable
- 4" x 6" x 2" Package
- Environmentally Rugged

Applications

- Aircraft Flight Testing
- Missile Performance Testing
- Remote Ground Communication

TRS-4810 Series Block Diagram

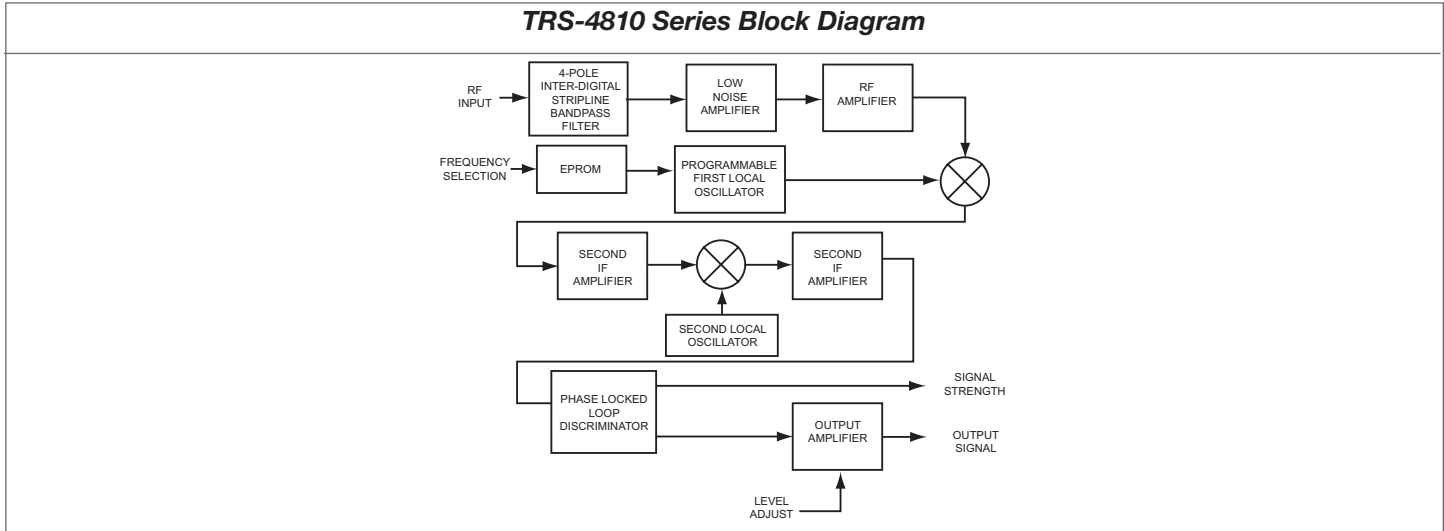

Revision 05/07/2015

TRS-4810 Series Datasheet

©2015 Teletronics - A Curtiss-Wright Company
 Specifications subject to change without notice.

Approved for Public Release 15-S-1969

Teletronics - A Curtiss-Wright Company
 15 Terry Drive, Newtown, PA 18940
 phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com



Management System
 AS9100C
 ISO 9001:2008