

48 Cubic Inch Video Receiver




Features

- L & S Bands
- IF Bandwidth to 4 MHz
- Frequency Selectable
- 4" x 6" x 2" Package
- Environmentally Rugged
- Available Options:
 - CCIR405 De-Emphasis
 - Selected Subcarrier Discriminator

Applications

- Video Transmission
- Aircraft Flight Testing
- Missile Performance Testing
- Remote Ground Communication

TRS-4830 Series Block Diagram

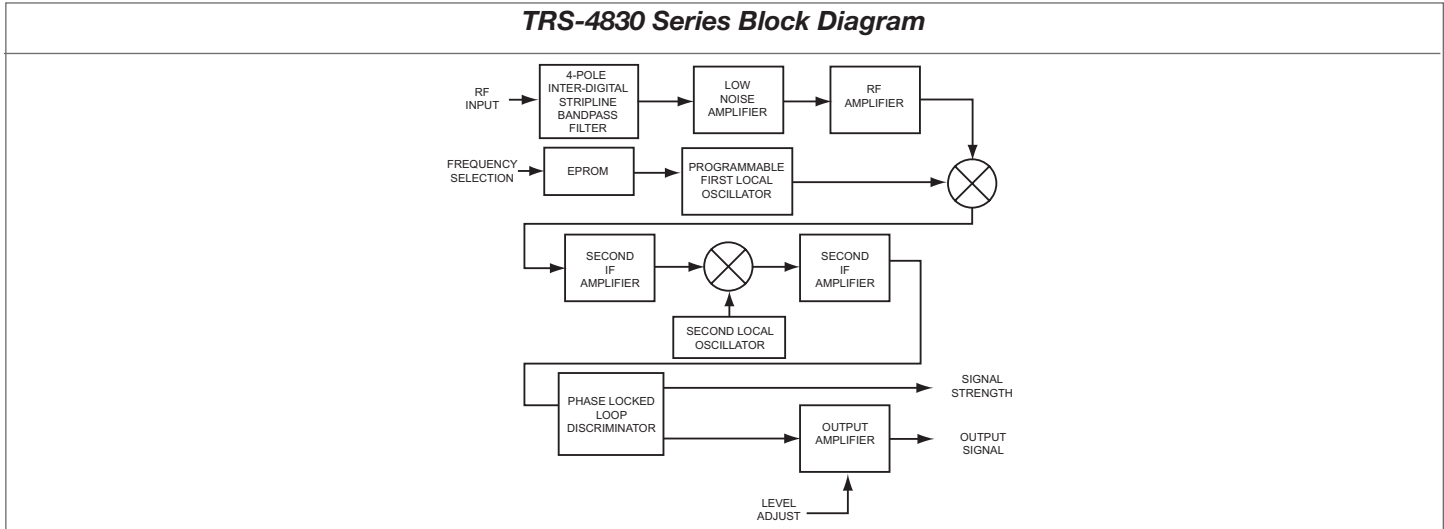

Revision 05/07/2015

TRS-4830 Series Datasheet

©2015 Teletronics - A Curtiss-Wright Company
Specifications subject to change without notice.
Approved for Public Release 15-S-1968

Teletronics - A Curtiss-Wright Company
15 Terry Drive, Newtown, PA 18940
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com



Management System
AS9100C
ISO 9001:2008