


1.3 Cubic Inch Telemetry Transmitter - 0.5, 1 or 2 Watts

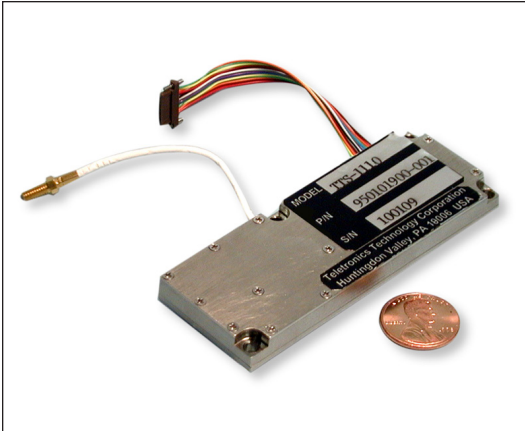

Features

- L & S Bands
- 0.5, 1, or 2 Watt Power Output
- Frequency Selectable
- 1.25" x 3.4" x 0.3" Package
- Environmentally Rugged


Description

TTS-1000 series transmitters are designed for use in telemetry, digital, wideband, and video applications. Versions are available to handle L and S bands at powers ranging from 0.5 watt to 2 watts. Compact package is just 1 cubic inch in size (1.25" x 3.4" x 0.3"). The transmitters are frequency selectable. Environmentally rugged construction for high reliability in the field. Various connector interfaces are available on special order.

Applications

- Video Transmission
- Aircraft Flight Testing
- Missile Performance Testing
- Space Craft Instrumentation
- Remote Ground Communication

TTS-1000 Series Block Diagram

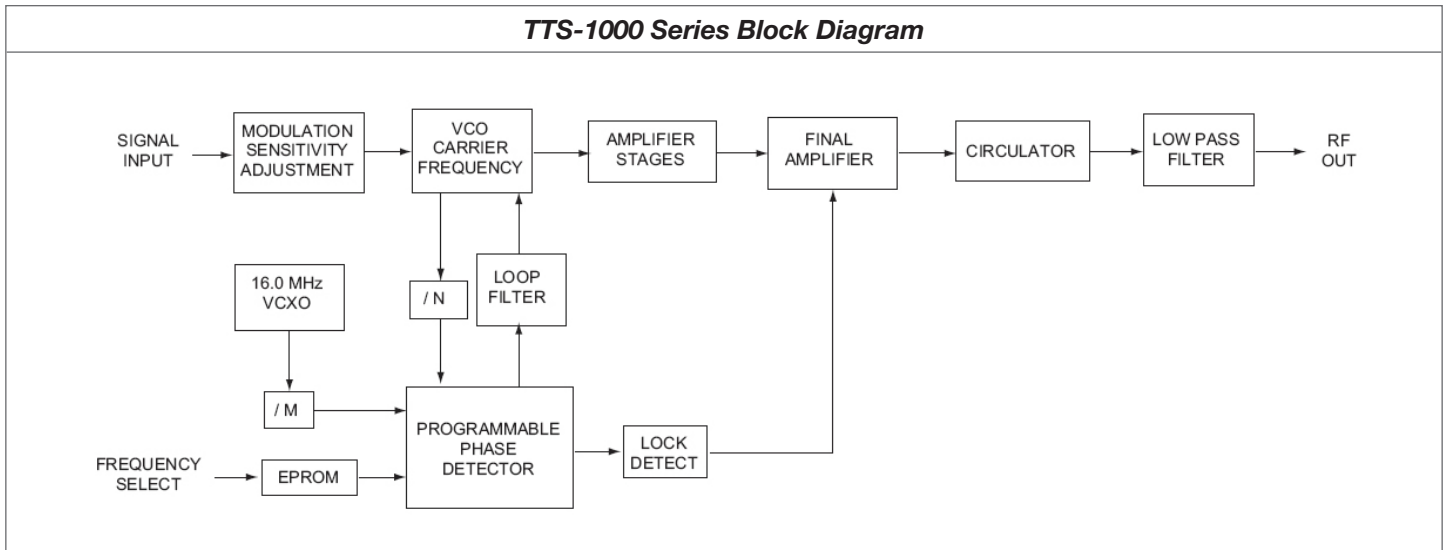

Revision 07/01/2016

TTS-1000 Series Datasheet

©2016 Teletronics - A Curtiss-Wright Company
Specifications subject to change without notice.

Approved for Public Release 16-S-2395

Teletronics - A Curtiss-Wright Company
15 Terry Drive, Newtown, PA 18940
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com



Management System
AS9100C
ISO 9001:2008