

11 Cubic Inch Telemetry Transmitter - 2, 5, 10, or 20 Watts



Features

- L & S bands
- 2, 5, 10, or 20 Watt power output
- Frequency selectable
- 2.5" x 3.5" x 1.31" package
- Environmentally rugged


Description

TTS-11000 series transmitters are designed for use in telemetry, digital, wideband, and video applications. Versions are available to handle L and S bands at powers ranging from 5 watt to 20 watts. Compact package is just 1 cubic inch in size (2.5" x 3.5" x 1.3"). The transmitters are frequency selectable and is offered with various modulation inputs, data, analog, or RS-170 Video. Environmentally rugged construction for high reliability in the field.

Applications

- Aircraft flight testing
- Missile performance testing
- Space craft instrumentation
- Remote ground communication

TTS-11000 Series Block Diagram

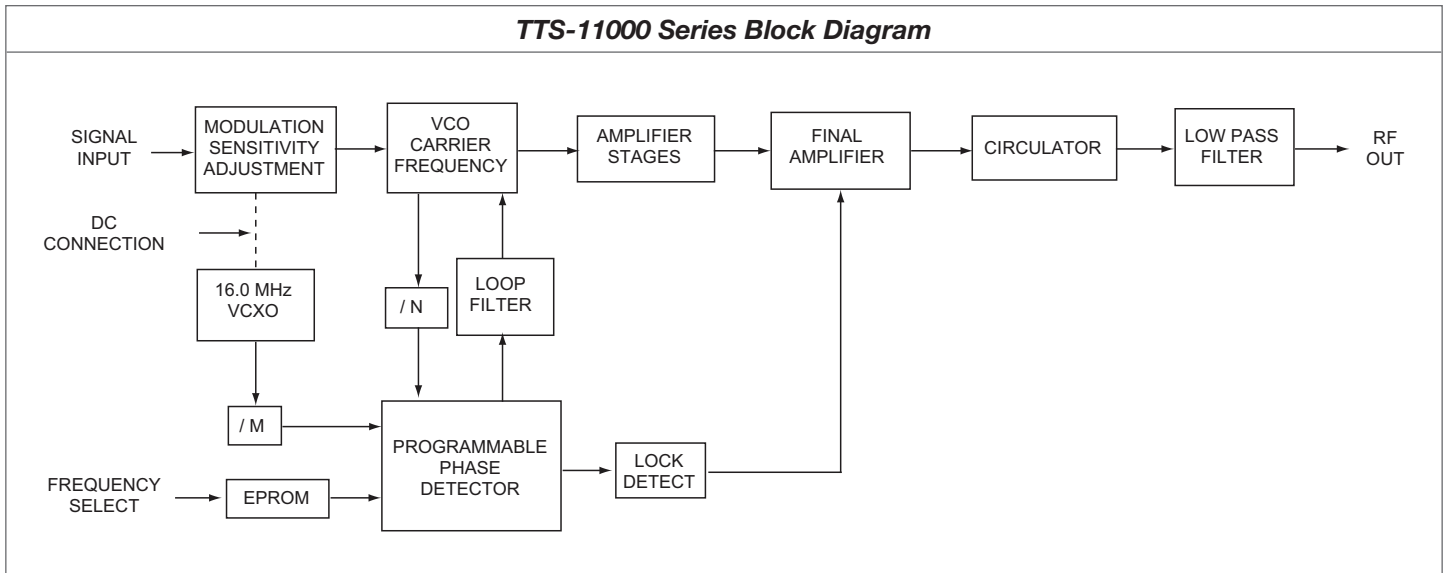

Revision 05/07/2015

TTS-11000 Series Datasheet

©2015 Teletronics - A Curtiss-Wright Company
 Specifications subject to change without notice.

Approved for Public Release 15-S-1928

Teletronics - A Curtiss-Wright Company
 15 Terry Drive, Newtown, PA 18940
 phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com



Management System
 AS9100C
 ISO 9001:2008