

### 3.3 Cubic Inch Telemetry Transmitter - 2 or 5 Watts



#### Features

- L & S Bands
- 2 or 5 Watt Power Output
- Frequency Selectable
- 2" x 3" x 0.66" Package
- Environmentally Rugged
- On/Off Control
- Pre-Emphasis


#### Description

TTS-3000 series transmitters are designed for use in telemetry, digital, wideband, and video applications. Versions are available to handle L and S bands at powers ranging from 2 watts to 5 watts. Compact package is just 3.3 cubic inches in size (2.0" x 2.5" x 0.66"). The transmitters are frequency selectable. Environmentally rugged construction for high reliability in the field.

#### Applications

- Video Transmission
- Aircraft Flight Testing
- Missile Performance Testing
- Space Craft Instrumentation
- Remote Ground Communication

**TTS-3000 Series Block Diagram**

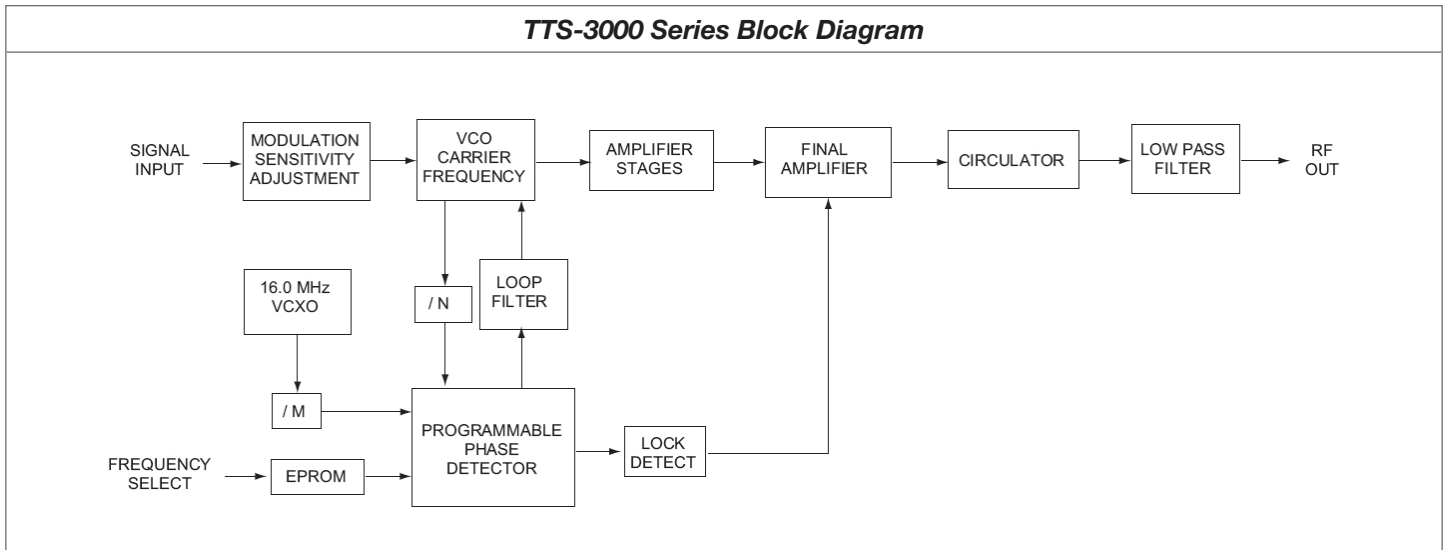

Revision 05/07/2015

#### TTS-3000 Series Datasheet

©2015 Teletronics - A Curtiss-Wright Company  
Specifications subject to change without notice.  
Approved for Public Release 15-S-1794

Teletronics - A Curtiss-Wright Company  
15 Terry Drive, Newtown, PA 18940  
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

[www.ttcdas.com](http://www.ttcdas.com)



Management System  
AS9100C  
ISO 9001:2008