


16-Channel Signal Conditioning Card - Voltage Excitation, Programmable Digital Filtering, & Simultaneous Sampling

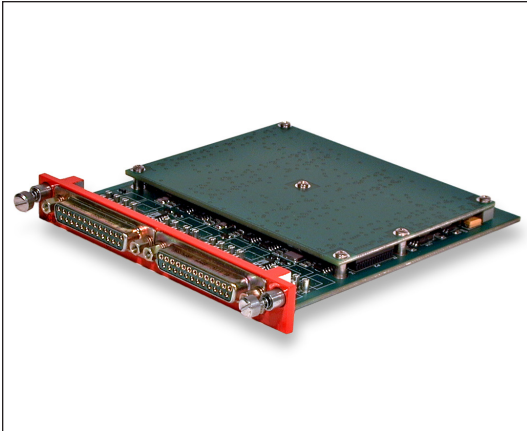

Applications

- Flight test instrumentation
- Factory automation and process control
- Strain gages, load cells, pressure transducers, ...
- Research measurements and experiments

Features

- 16 channels per card
- Simultaneous sampling capability
- Programmable digital presample filtering
 - 32 tap Finite-Impulse-Response (FIR) filters
 - Approximates 12 pole Butterworth filter
 - Stop band attenuation of 85dB
 - Analog anti-aliasing filter
 - Automatic adaptive filter
- Programmable voltage excitation
- Programmable gain and offset
 - >10,000 settings from 1 to 1,000
- Zero and voltage substitution calibration
- >1,000 Megohms input impedance (power on)
- $\pm 0.25\%$ system accuracy (auto cal enabled)
- $\pm 0.5\%$ system accuracy (auto cal disabled)
- > 1 Megohm input impedance (power off)
- Automatic parasitic offset correction on power-up and ZCAL. This feature can be disabled
- $\pm 35\text{VDC}$ overvoltage protection
- Compatible with WDAU-20XX operating to 20Mbps
- Microsoft Windows application software included

Description

The SCD-116D is a 16-channel plug-in signal conditioning card for use in TTC's EDAU-20XX and CDAU-20XX products. The card is intended for applications that require significant signal conditioning flexibility and simultaneous sampling capability. The card provides constant voltage excitation, programmable presample filtering, calibration and user-programmable gain. The FIR filter is phase locked to the channels format sample rate to maintain time correlation between the input signal and the PCM output. The filter can be set for 3, 4, 5, 6, 8 or 10 times oversampling (the filter -3dB point will be automatically set to the format sampling rate divided by the oversampling value). The conditioned analog signal is digitized at up to 16-bit resolution for transmission in the system PCM output format.

Revision 03/12/2009

SCD-116D Datasheet

©2009 Teletronics - A Curtiss-Wright Company
 Specifications subject to change without notice.

Approved for Public Release 13-S-2902



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008

Teletronics - A Curtiss-Wright Company
 15 Terry Drive, Newtown, PA 18940
 phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com